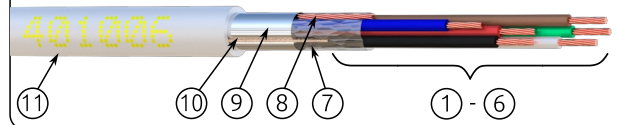
**elbaC Cable**

ZAC sous le Beer - RD 836
 F-27730 BUEIL (Eure - France)
 Tél : +33 (0)2 32 62 00 92
 Fax : +33 (0)2 76 01 31 80
 www.elbac.fr / info@elbac.fr

**Construction****Inner conductor** ① - ⑥

Material	Annealed Copper
Diameter	7 × Ø 0,20 ± 0,025 mm
Area	0,22 mm ²

Insulation

Material	PVC
Diameter	Ø 1,00 mm

Assembly**6 Conductors**

Colors	See color table
--------	-----------------

Mylar spiral ⑦

Coverage	90 %
----------	------

Drain wire ⑧

Material	Annealed Copper
Diameter	7 × Ø 0,20 ± 0,02 mm
Area	0,22 mm ²

Screen ⑨

Material	Alu/Polyester Tape
Coverage	≥ 115 %

Rip Cord ⑩

	200D
--	------

Sheath ⑪

Material	PVC White - RAL 9016
Diameter	Ø 4,40 ± 0,15 mm

Mass

	36 kg/km
--	----------

Marking of sheath

Printing with XXX : Quantity in meter still available per reel DDDDD : Date code	Alarme 6C - CE - elbaC 401006 - DDDDD - XXX m
--	---

Color / Process	Yellow / Ink jet
-----------------	------------------

Step	1 m
------	-----

Electrical characteristics

Max conductor DC resistance	< 104.5 Ω/km
Rated voltage	30 V
Insulation resistance 20°C	> 200 MΩ.km

Color table

Condu.	Colors		RAL
①	Black	●	9005
②	Red	●	3001
③	White	○	9003
④	Green	●	6018
⑤	Brown	●	8002
⑥	Blue	●	5005

Meet Standards

Environment :	European directive 2011/65/EU
Marking :	CE
Fire reaction :	EN 50575:2014/A1:2016

Thermal characteristics

CPR fire reaction class	E _{ca}
Rated temperature	80°C

Packaging

- B1	: 100m / Carton Box
- R5	: 500m / Easy Reel Box
- W5	: 500m / Wooden Drum

Notes

--