


IR VANDAL-PROOF FISH EYE CAMERA

FEI-360IP5

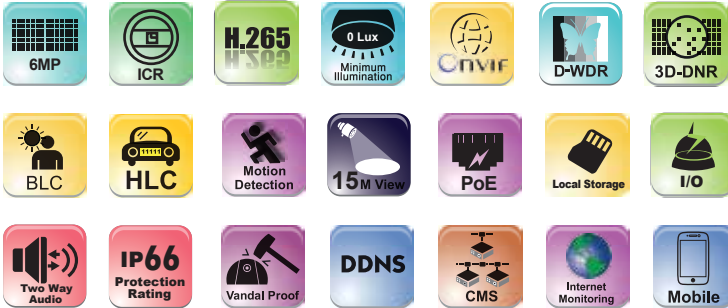

- | | | | |
|-------------------------------------|--------------------------------------|---------------------|--------------------|
| 1/2.9" CMOS Sensor | ONVIF | 15m IR Illumination | I/O |
| 6 Mega-Pixel | Digital WDR / BLC / HLC | PoE Support | CVBS |
| True Day & Night (IR Cut Removable) | 3D Noise Reduction | Local Storage | IP 66 Protection |
| H.265 (HEVC) Compression | Motion Detection and Privacy Masking | 2 Way Audio | IK 10 Vandal Proof |
| 0 Lux (IR On) Min. Illumination | 1.07mm 360° Lens | Built-In Microphone | |

Specifications

| | | | |
|---------------|--|---|--|
| Camera | Video | Model | FEI-360IP5 |
| | | Image Sensor | 6MP 1/2.9" CMOS (3096 × 2196) |
| | | Effective Pixels | 2160x2160 (1:1) |
| | | Electronic Shutter | 1/25s ~ 1/1000000s |
| | | Frame Rate | 1-25/30FPS |
| | | Day & Night | ICR |
| | | Min. Illumination | Day: 0.04lux / Night: 0.01lux (@F2.0, AGC On) 0lux with IR on |
| | Audio | Audio compression | G.711A/G.711U |
| | | Communication | Two-way Audio |
| | Image Processing | Image Settings | AWB, AGC Adjustable Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable |
| | | Image Enhancement | Digital WDR / BLC / HLC / ROI |
| | | Noise Reduction | 3D-DNR |
| | | Image Orientation | Ceiling / Wall Installation |
| | | Privacy Zone | Yes |
| | | Motion Detection | Yes |
| Analytics | | No | |
| Compression | Video Compression | H.265 / H.264 | |
| | Resolution | 5MP(2160x2160), 4MP(1920x1920), 2MP(1440x1440), 960x960, 480x480 | |
| | View Modes | Fish-Eye (360° Bubble), 360° Stretched view (Lens Correction), 360° Split View, Fish-Eye (360° Bubble) + 3 Digital PTZ | |
| | Bit rate | 64Kbps ~ 10Mbps@H.265 / 64Kbps ~ 10Mbps@H.264 | |
| | Encode Mode | VBR/CBR | |
| Image Quality | Five levels under VBR; Free adjustment under CBR | | |

| | | |
|------------------|----------------------|--|
| Housing | IR Distance | 15m (6 High Power Wide Angle IR LED) |
| | Lens (Field of View) | 1.07mm (360° for Ceiling Mount / 180° For Wall Mount) |
| | Iris | Fixed Iris |
| | Lens Mount | Φ14 mount |
| | Protection Rate | Water Proof: IP66 / Vandal Proof: IK10 |
| | Bracket | Surface Mount (Ceiling / Wall) |
| Connectivity | Dimensions | Φ130mm×39mm |
| | Weight(gross) | 432g |
| | Network | RJ45 (+PoE) |
| | Power | DC Socket |
| | Analog Video Output | CVBS (BNCx1) |
| | Audio Connectivity | Built-In Microphone / Mic Input + Audio Output |
| | SD Card | Event/Schedule based Main/Sub-Stream recording (Up to 128Gb) |
| | RS485 | Yes |
| | Alarm | 1Ch Input, 1Ch Output |
| | Network | Remote Monitoring |
| User Access | | Supports simultaneous monitoring for up to 10 users with multi-stream real time transmission |
| Network Protocol | | TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP |
| ONVIF | | Yes |
| Others | Ethernet | 100Mbps |
| | PoE | Yes |
| Power Supply | Power Supply | DC12V/~300mA / PoE/~3W |
| | Work Environment | -20 C ~ 50 C, 10%~90% Humidity |

