



NVR5-8200PXN(MM)

8CH 5MP PoE NVR with alarms, and NDAA compliance

Provision-ISR's NVR5-8200PXN(MM) is a high-performance network video recorder with an integrated 8-channel PoE switch for high-definition surveillance. This NDAA-compliant, easy-to-install solution is suitable for small-sized installations (up to 8 channels), providing you with everything you need for a trouble-free CCTV project.

8
CH

5
MP

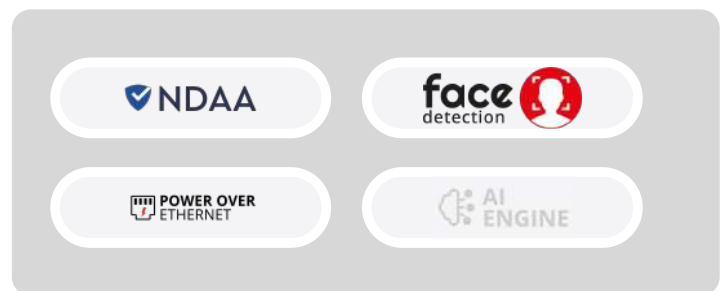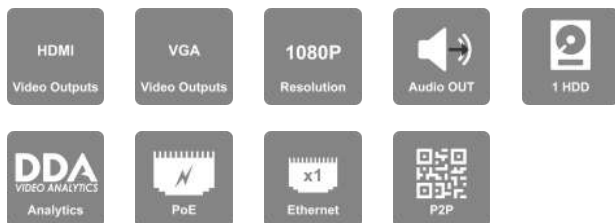

MAIN FEATURES

Video:

- Input: 8 Channel Support
- 8 Channel PoE / Standard Network Connection (Via 8 x RJ-45 / Network)
- Output: HDMI / VGA (1080P, 1280×1024, 1024×768)

Bandwidth:

- Incoming: 64Mbps
- Outgoing: 64Mbps

Decoding Support:

- H.265S/H.265+/H.265/H264

Analytics:

- Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Loitering Detection, Illegal Parking, Audio Exception, Heat Map, Object Counting (Line), Object Counting (Area), Crowd Gathering, People Intrusion, Object Monitoring, Smart Search, Thermal
- *DDA Analytics Live Snapshots are not supported

Recording:

- 8CH 5MP Real-Time
- FPS: 200 (PAL) / 240 (NTSC)

Playback:

- Local: 8Ch Simultaneously
- Remote: 8Ch Simultaneously

Audio:

- Input: IPC Inputs Only
- Output: IPC Outputs Only

Alarm:

- Input: Based on IPC only
- Output: Based on IPC only

Storage:

- 1 x SATA (Up to 6TB each)

USB Port:

- 2 USB 2.0 Port

Network:

- 1 x RJ-45: 10/100Mbps Each

Remarks:

- The following features are based on firmware v1.4.12_76576_RD250115 and are subject to firmware version changes.



SPECIFICATIONS

3rd Party Cyber Protection	
General	N/A
Protection Methods	N/A
NDAA Compliant	
NDAA Compliant	Yes
Video	
Video Input	8Ch over Network / PoE direct connection
Output	HDMI / VGA (1080P, 1280x1024, 1024x768)
View Mode	Mirrored
Fish-Eye Dewarp	VMS + Web Only (1 at a time)
Decoding Format	H.265 / H.265+ / H.265S / H.264
Decoding Capabilities	1Ch – 5MP ; 4Ch – 1080P
Audio	
Audio-specs-Input	Based on IPC only
audio-specs-Output	Based on IPC only IP Speaker (only for speaking)
Compression	G.711A/G.711U
Two Way Audio	No
Record/ Main Stream	
Real-Time Recording	8CH 5MP Real-Time
Record Type	Video / Video + Audio
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS and all of its combinations
16MP	N/A
12MP	N/A
8MP	N/A

5MP and lower	240FPS(NTSC)/200FPS(PAL)
Master stream over network	Up to 8CH@Recording Resolution

Analytics	
Supported Analytics	Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Loitering Detection, Illegal Parking, Audio Exception, Heat Map, Object Counting (Line), Object Counting (Area), Crowd Gathering, People Intrusion, Object Monitoring, Smart Search, Thermal *DDA Analytics Live Snapshots are not supported
Analytics Channels (IPC Based)	8Ch (requires supporting IPC)
Analytic Channels (NVR Based)	N/A
Face Recognition Rate	N/A

Bandwidth	
Incoming	64Mbps
Outgoing	64Mbps

Substream	
Resolution substream	Depends on IPC

Remote view	
Max Channel View	40Ch (Limited to Outgoing Bandwidth Capacity)

Remote Applications	
User Access	64 Users online with Professional Authority Management
Mobile App	Provision Cam2 for iOS/Android
PC/Mac Software	Ossia VMS Standard / Enterprise
Plug-in free Web-Browser	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback) *P2P WEB connetion always requires Plugin
Plug-in based Web-Browser	Internet Explorer

Playback	
Local	8Ch
Remote	8Ch

Search Mode	DDA Object, Smart Search, Time-Slice, Time, Event, POS
--------------------	--

Backup

USB	2 USB 2.0 Port
Backup Format	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)

Alarm

Alarm-in	Based on IPC only
Alarm-out	Based on IPC only

Storage

HDD	1
HDD Max Capacity	6TB
E-Sata Support	No
Total HDD Max Capacity	6TB
RAID	N/A

PTZ

Connection	via Network
Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
RS-485	N/A

Network

Ethernet	10/100Mbps self-adaptive Ethernet interface
Protocols	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, HTTPS, 820.1X, SNMP, Auto Report Input + Output (Ossia VMS)
ONVIF	Full Device Support (Profile T/G, ONVIF Version 20.12)

PoE

PoE Ports	8xRJ45
------------------	--------

NVR5-8200PXN(MM)

Speed	10/100Mbps (10Mbps under CCTV Mode)
Standard	PoE (IEEE802.3AF/AT)
CCTV Mode	Yes (Up to 200m and 10Mbps bandwidth)
Total Power	72W (Average 9W per Channel)
Max. Power Output (Per Ch.)	~25.5W

Others	
Power Supply	DC48V/2.5A
Power consumption (No HDD)	5W
Dimension	W255xD220xH45mm
Operation Temperature	0°C~50°C

NVR5-8200PXN(MM)

DIMENSIONS

